

# EC 207 *XSafe EcoX*

## Self Contained Ice Machine 150 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity



### FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front access condenser air filter, removable and washable (air cooled version only).
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC L  
Large Gourmet 39 g  
Ø 38 mm - H 41 mm



EC M  
Medium Gourmet 20 g  
Ø 30 mm - H 34 mm

### CONDENSING SYSTEM

Water cooled  
Air cooled

### REFRIGERANT GAS

R290

### VOLTAGE V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
EC L	Large	38 mm	41 mm	39 g
EC M	Medium	30 mm	34 mm	20 g

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

#### IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Self Contained Ice Machine 150 kg

February 2025


# EC 207 *XSafe EcoX*

## Self Contained Ice Machine 150 kg

**Scotsman**<sup>®</sup>  
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 150 kg

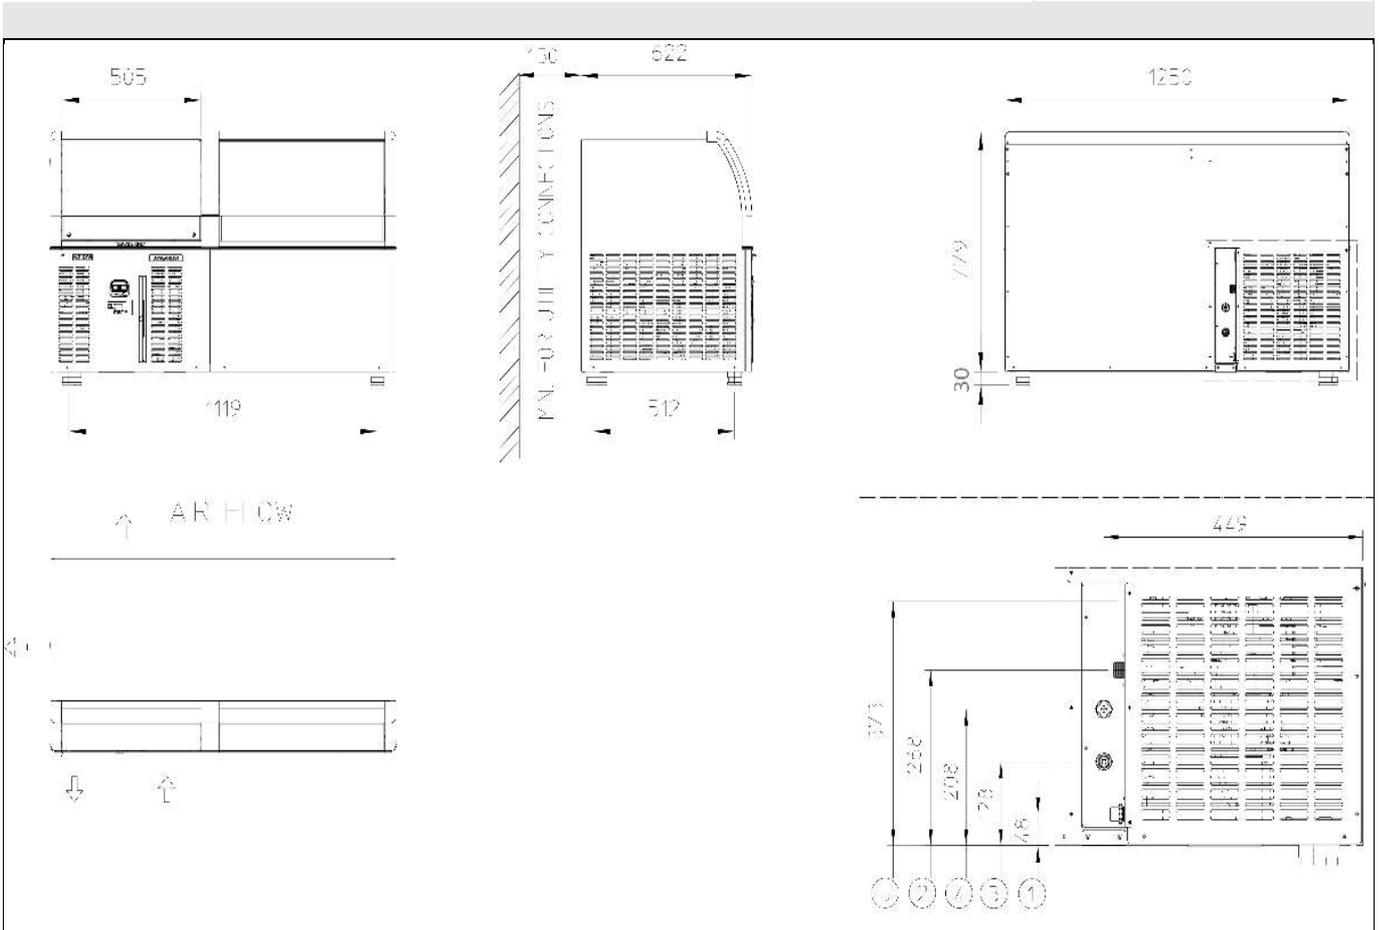

UNIT DATA			SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)										
Net weight			Gross weight										
1.250 x 620 x 780 mm			1320 x 690 x 960 mm										
84 kg			97kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm2	A	
			kg	kg	kg								
ECM 207 WS	230\50\1	W	150	147	135	50	2,6	18	151	850	3 x 1,5	10	
ECM 207 AS	230\50\1	A	145	150	115	50	2,1	22	18	1.170	3 x 1,5	10	
ECL 207 WS	230\50\1	W	140	138	135	50	2,6	18	150	850	3 x 1,5	10	
ECL 207 AS OX	230\50\1	A	135	130	105	50	2,1	22	13	1.170	3 x 1,5	10	