

# NW 308 XSafe

## Modular Ice Machine 160 kg

Item #:
Project:
Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- Space saving top air discharge: no need of side clearance.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 308  
Dice 10 g  
W 22 x D 22 x H 22 mm



NW H 308  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NW L 308  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1

### RECOMMENDED BINS

Head	Bins		kg
NW 308	✓	<b>SB193</b>	129
	✓	<b>SB322</b>	168
	CBT30EMCD	<b>SB393</b>	181
	CBT30EMCD	<b>SB530</b>	243

#### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Modular Ice Machine 160 kg

# NW 308 XSafe

## Modular Ice Machine 160 kg

Item #:
Project:
Quantity:

Modular Ice Machine 160 kg

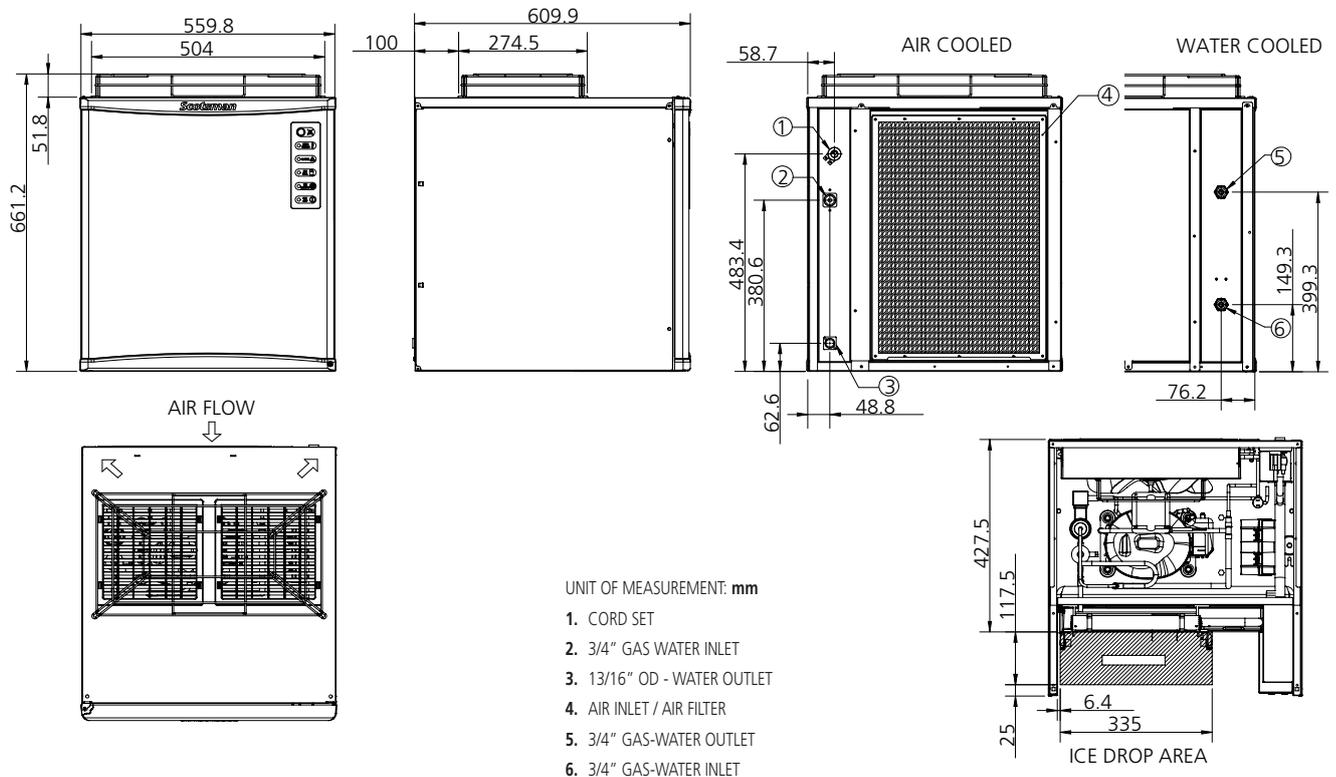

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)	560 x 610 x 609 mm	Carton (W x D x H)	620 x 680 x 800 mm								
Net weight	54 kg	Weight	63 kg								
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm <sup>2</sup>	A
NWH 308 AS	230/50/1	160	145	110	15.4	17.0	7.6	950	1800	3 x 1.5	16
NWH 308 WS	230/50/1	150	140	112	13.7	15.3	87.8	950	1800	3 x 1.5	16
NWL 308 AS	230/50/1	150	130	100	16.8	16.8	7.9	950	1800	3 x 1.5	16
NWL 308 WS	230/50/1	145	135	105	14.3	15.0	82.0	950	1800	3 x 1.5	16
NW 308 AS	230/50/1	160	140	100	16.8	16.8	7.3	950	1800	3 x 1.5	16
NW 308 WS	230/50/1	150	145	122	11.9	14.5	109.6	950	1800	3 x 1.5	16