

# NW 1008 XSafe

## Modular Ice Machine 485 kg

Item #:
Project:
Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NW 1008  
Dice 10 g  
W 22 x D 22 x H 22 mm



NW H 1008  
Half Dice 6 g  
W 10 x D 22 x H 28 mm



NW L 1008  
Large Dice 15 g  
W 28 x D 22 x H 28 mm

### CONDENSING SYSTEM

Air cooled  
Remote condenser  
Water cooled

### REFRIGERANT GAS

R404A  
R452A

### VOLTAGE V/Hz/ph

230/50/1  
380/50/3

### RECOMMENDED BINS

Head	Bins		kg
NW 1008	✓	<b>SB393</b>	181
	✓	<b>SB530</b>	243
	CBT48EAMCD CBT48FMCD	<b>SB948</b>	406
	CBT52EAMCD	<b>SB1025</b>	478
	●	<b>UBH1100</b>	553
	●	<b>UBH1600</b>	812

#### LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

### CERTIFICATIONS



### OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice.  
This spec sheet is meant for commercial purpose only.  
For technical documentation please refer to our service manuals.

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)


Modular Ice Machine 485 kg

# NW 1008 XSafe

## Modular Ice Machine 485 kg

Item #:
Project:
Quantity:

Modular Ice Machine 485 kg

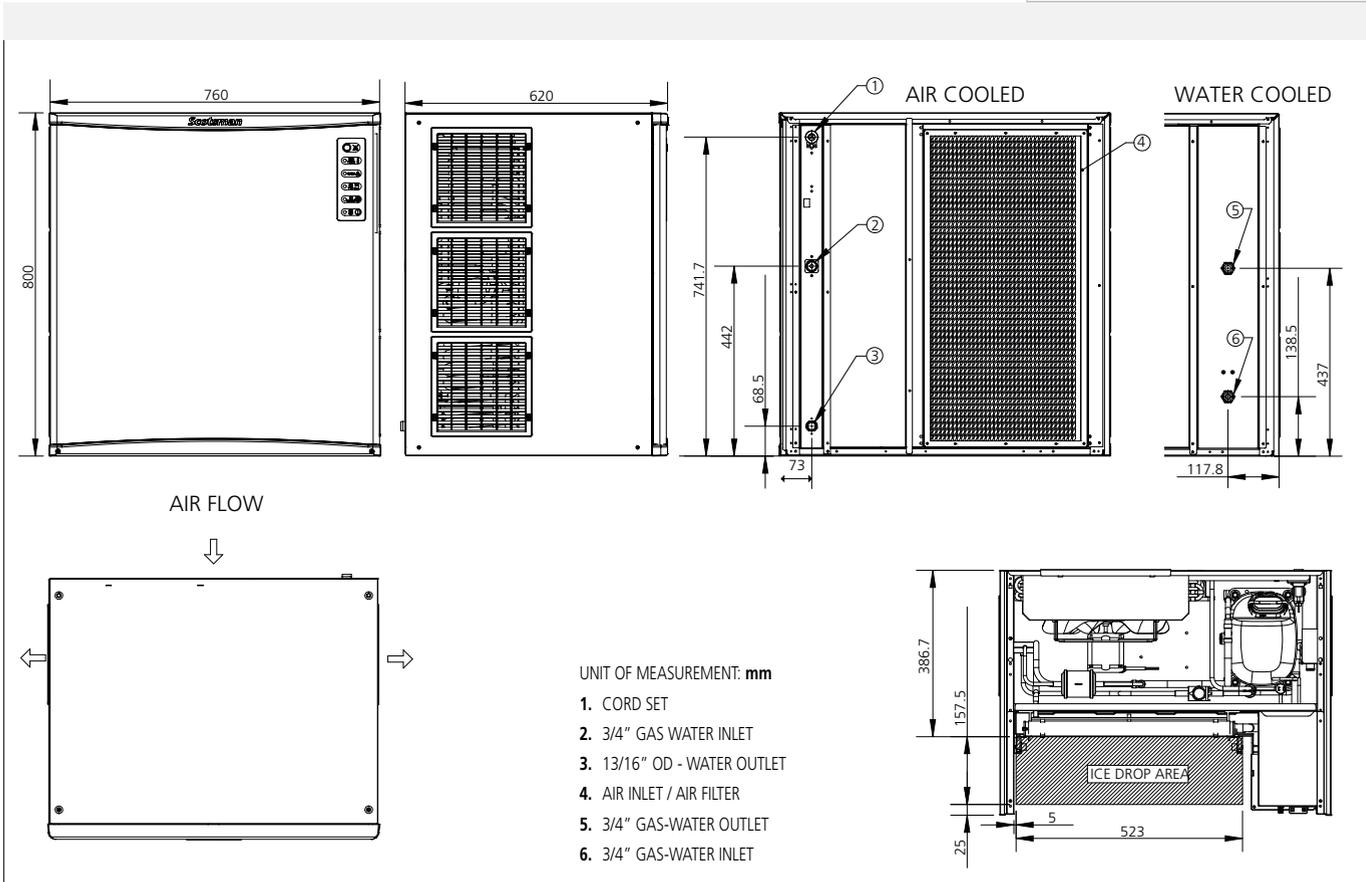

UNIT DATA		SHIPPING DATA		(*) Data refer to 32°C Amb. / 21°C Water temperature conditions								
Size (W x D x H)		760 x 620 x 800 mm		Carton (W x D x H)		830 x 690 x 990 mm						
Net weight		105 kg		Weight		122 kg						
Version	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size	
		10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A	
NWH 1008 AS	230/50/1	485	456	380	13.2	50.3	22.3	2500	7300	3 x 2.5	30	
NWH 1008 ASR	230/50/1	475	470	420	14.1	59.2	25.5	2500	7300	3 x 2.5	30	
NWH 1008 WS	230/50/1	460	460	410	12.1	49.7	173.2	2500	7300	3 x 2.5	30	
NWL 1008 AS	230/50/1	485	456	380	13.2	50.3	22.3	2500	7300	3 x 2.5	30	
NWL 1008 ASR	230/50/1	465	470	420	12.8	53.7	25.1	2500	7300	3 x 2.5	30	
NWL 1008 WS	230/50/1	460	450	400	12.1	48.5	169.0	2500	7300	3 x 2.5	30	
NW 1008 AS	230/50/1	485	456	380	13.1	49.9	22.3	2500	7300	3 x 2.5	30	
NW 1008 ASR	230/50/1	470	470	420	13.1	55.2	24.7	2500	7300	3 x 2.5	30	
NW 1008 WS	230/50/1	460	450	410	12.1	49.7	173.2	2500	7300	3 x 2.5	30	
NW 1008 AS	380/50/3	480	460	380	13.9	52.8	24.4	2500	7300	5 X 2.5	10	
NWH 1008 AS	380/50/3	460	450	380	13.9	52.8	24.4	2500	7300	5 X 2.5	10	
NWL 1008 AS	380/50/3	460	440	370	13.4	49.7	21.1	2500	7300	5 X 2.5	10	
NW 1008 WS	380/50/3	460	450	410	13.4	55.1	173.2	2500	7300	5 X 2.5	10	
NWH 1008 WS	380/50/3	460	460	410	13.4	55.1	173.2	2500	7300	5 X 2.5	10	
NWL 1008 WS	380/50/3	460	450	400	13.4	53.8	169.0	2500	7300	5 X 2.5	10	